

# BISTABLE SINGLE POLE



## S 250 SERIES BATTERY MASTER SWITCH



# S 250 SERIES

ELECTRICAL & MANUAL CONTROL

- 300 A CONTINUOUS RATING ●
- ZERO CONSUMPTION IN OFF POSITION ●



# S 250 SERIES

BATTERY MASTER SWITCH

## TECHNICAL DATA

### MAIN CHARACTERISTICS

Rated voltage	12 / 24 V
Temperature range	- 40 to +85 °C
Housing material	PBT glass filled
Housing color	Black
Weight	1000 g
Protection degree (ISO20653)	IP42
Compliant with directive	REACH - 2000/53/CE
Approved according to	ISO10133

### POWER CIRCUIT

Continuous rating	300 A
Overload	1500 A (15 s)
Max DC voltage	16 / 32 V
Terminals size	M10
Contact resistance	<1 mΩ
Terminals length	10 mm
Tightening torque	14N.m±20%
Terminals material	Silver plated copper

### CONTROL CIRCUIT

Voltage range	10.5 - 16 V / 18 - 32 V
Control signal	Monostable
Switching current	10 A - 12 V / 7.3 A - 24 V (200 ms)
Idle current in OFF position	0 mA
connection	6 wires cable

### AUXILIARY CONTROL

Type	Manual
------	--------

### AUXILIARY CIRCUIT


Type	Status feedback (changeover relay)
Continuous rating	100 mA max

## PRODUCT SELECTION

P/N	VOLTAGE	POLARITY
202312	12 V	+ CUT-OFF
202313	24 V	+ CUT-OFF
202314	24 V	GND CUT OFF
202315	12 V	GND CUT OFF


On request: specific technical demand can be studied

## MOUNTING INTERFACE



Screwing torque M8 : 10N.m ±10%

## DIMENSIONS

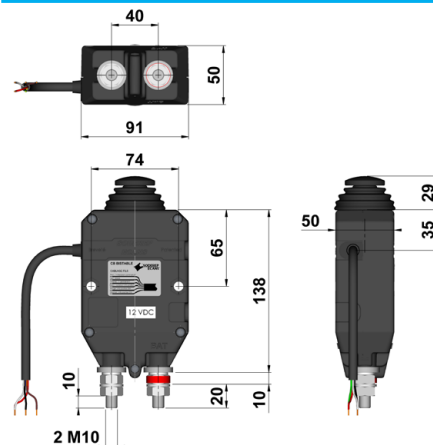


## ACCESSORIES



**202170**  
S 700 SERIES  
One pole switch



**202326**  
713 SERIES  
Cabling kit  
for control switch




# S 250 SERIES


BATTERY MASTER SWITCH

## ELECTRICAL DIAGRAM

202312 | 202313



202314 | 202315



WIRE SECTION	NUMBER	WIRE COLOR	CABLING
1 <sup>2</sup>	3	Brown	ON-OFF control input +BAT
	6	yellow	Micro relay external supply (only P/N 202314 & 202315)
	5	Green	GND
	1	White	Contact state feedback: common
	2	Grey-black	Contact status feedback: ON
	4	Red	Contact status feedback: OFF

NOT SUITABLE FOR REGULAR SWITCHING UNDER LOAD